




The fixed and rotating telehandler ranges for construction

Discover a wide range of Manitou telehandlers. Each model is designed to respond directly to your day-to-day concerns, whether you are a rental company or an end user.



- Dealer Network
- Maintenance contracts
- Financing
- Warranty extension
- Fleet management
- Second-hand
- Original spare parts

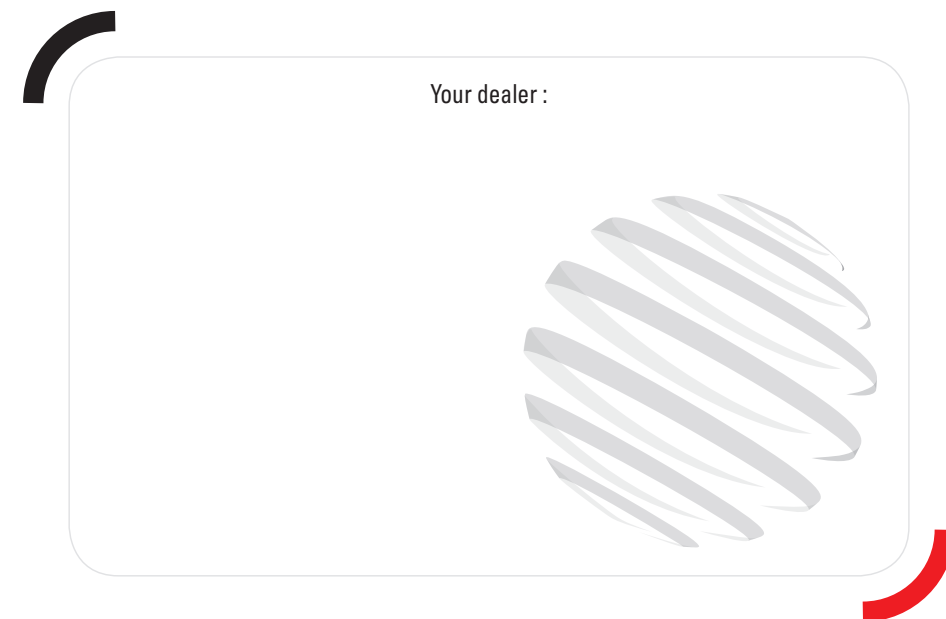

Registered office
B.P. 249 - 430 rue de l'Aubinière - 44158 Ancenis Cedex - France
Tél : 00 33 (0)2 40 09 10 11 - Fax : 00 33 (0)2 40 09 10 97
www.manitou.com



708014EN_A_0016_Construction_Xrange_Tech



CONSTRUCTION FIXED & ROTATING TELEHANDLERS




Handling your world

The Manitou Group was founded by the Braud family more than 60 years ago. Today, the Manitou Group is the world leader in all-terrain material handling. It designs, manufactures, distributes and services equipment for construction, agriculture and many other industries.

The Group's product ranges include all-terrain fixed, rotating and heavy-load telehandlers; all-terrain, semi-industrial and industrial masted forklift trucks; wheel or track skid-steer loaders; access platforms; truck-mounted forklifts; warehousing equipment; and attachments.

Through its iconic brands - Manitou, Gehl and Mustang - distributed by a network of 1,400 dealers, the Group offers the best solutions to create optimum value for its customers.

Headquartered in France, the group registered in 2015 a revenue of 1,287 billion Euros in 140 countries and employs 3,214 people all committed to satisfying customers.

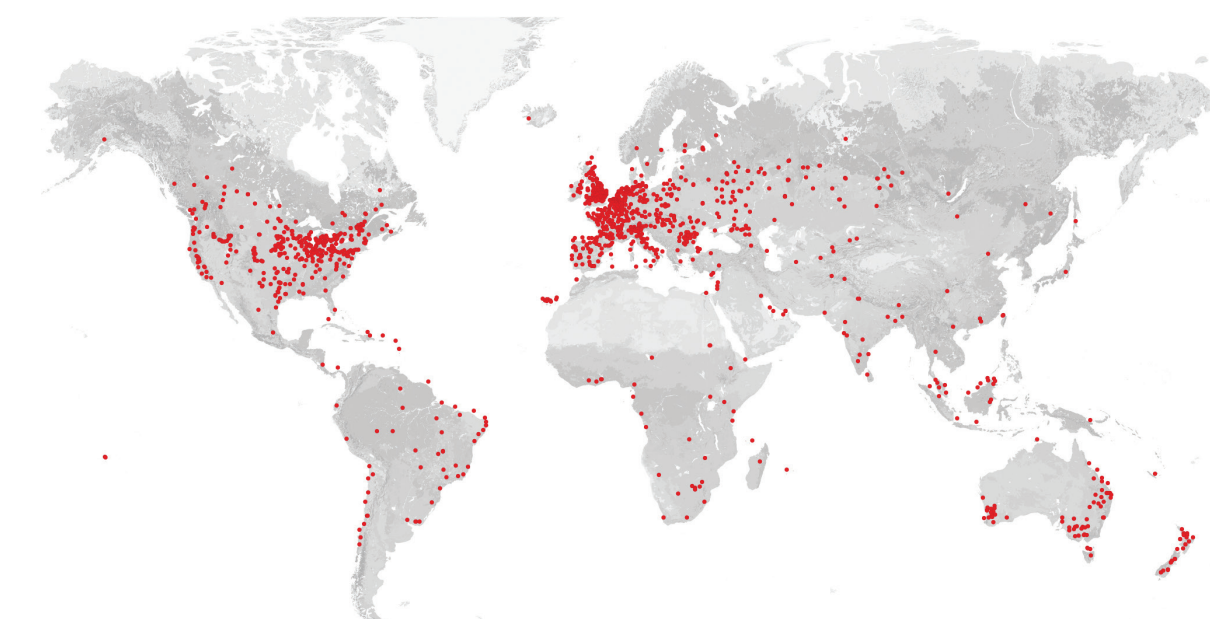

Fixed
Telehandlers

Max. capacity (kg)
Max. lifting height (m)
Engine
Power (hp / kW)
Max. travel speed (kph)
Transmission
Unladen weight (with forks) (kg)
Overall width (m)
Overall height (m)
Overall length to carriage (m)



MT-X 625
2500
5.85
Kubota
75 / 55.4
25
Hydrostatic
4800
1.81
1.92
3.9



MT-X 732
3200
6.90
Perkins
95 / 70
25
Torque converter
6945
2.26
2.30
4.76



MT-X 1030 ST
3000
9.64
Perkins
101 / 74
27
Torque converter
7525
2.26
2.30
4.99



MT-X 1440 SLT
4000
13.60
Perkins
101 / 74
27
Torque converter
11230
2.31
2.61
6.09



MT-X 1740 SLT
4000
16.65
Perkins
101 / 74
27
Torque converter
11362
2.45
2.61
6.26



MT-X 1440
4000
13.53
Perkins
101 / 74
25 / 35
Torque converter
10850
2.35
2.45
6.13



MT-X 1840
4000
17.55
Perkins
101 / 74
25 / 35
Torque converter
11700
2.42
2.50
6.27

Heavy
Telehandlers

Max. capacity (kg)
Max. lifting height (m)
Engine
Power (hp / kW)
Max. travel speed (kph)
Transmission
Unladen weight (with forks) (kg)
Overall width (m)
Overall height (m)
Overall length to carriage (m)



MHT-X 780
8000
6.8
Perkins
144 / 106
28
Hydrostatic
12800
2.44
2.52
5.22



MHT-X 790
9000
6.84
John Deere
141 / 104
30
Hydrostatic
13020
2.47
2.48
5.27



MHT-X 860
6000
8.1
Perkins
144 / 106
28
Hydrostatic
11580
2.40
2.46
5.36



MHT-X 1490
9000
13.65
Mercedes
176 / 129
40
Hydrostatic
20800
2.50
3.00
6.71



MHT-X 10130
13000
9.62
Mercedes
176 / 129
31
Hydrostatic
18490
2.51
2,99
6.14



MHT-X 10180
18000
9.63
Mercedes
176 / 129
25
Hydrostatic
24000
2.52
3.00
6.65



MHT-X 10230
23000
9.65
Mercedes
176 / 129
25
Hydrostatic
29300
2.85
3.05
6.99



HT-X 14350	
35000	
13.60	
Mercedes	
350 / 260	
25	
Hydrostatic	
69000	
3.53	
3.82	
10.93	

Rotating
Telehandlers

Max. capacity (kg)
Max. lifting height (m)
Engine
Power (hp / kW)
Max. travel speed (kph)
Transmission
Unladen weight (with forks) (kg)
Overall width (m)
Overall height (m)
Overall length to carriage (m)



MRT-X 1440 Easy
4000
13.8
Perkins
102 / 75
32
Hydrostatic
12490
2.40
2.97
5.35



MRT-X 1640 Easy
4000
15.8
Perkins
102 / 75
32
Hydrostatic
13000
2.40
2.97
6.36



MRT-X 1840 Easy
4000
17.9
Perkins
102 / 75
32
Hydrostatic
13300
2.40
2.97
5.54



MRT-X 2150 P+
4999
20.6
Mercedes
150 / 110
40
Hydrostatic
17930
2.49
3.05
6.87



MRT-X 2550 P+
4999
24.6
Mercedes
150 / 110
40
Hydrostatic
18900
2.49
3.05
7.84



MRT-X 3255 P+
5500
31.6
Mercedes
197 / 145
40
CVT
23986
2.50
3.20
8.50



Common to all ranges

- 4 wheel drive and 4 wheel steer
- oscillating rear axle
- full range of easily interchangeable attachments
- robust & reliable design

Manitou telehandlers comply with current environmental and safety standards.



Check out our
attachments at:

manitou.com